


Precision live centers with small head diameter and with a crest angle 60°

Mk	Ø D	Ø d	L	I	II	n	Q	w	catalogue no.
2	34	15	126	18	44	6 000	180	0,005	21-22041
3	36	16	144	19	44	5 000	400		21-12370
4	42	20	177	24	50,5	5 000	700		21-14296
5	60	30	226	35	61,5	4 000	1 000		21-27443

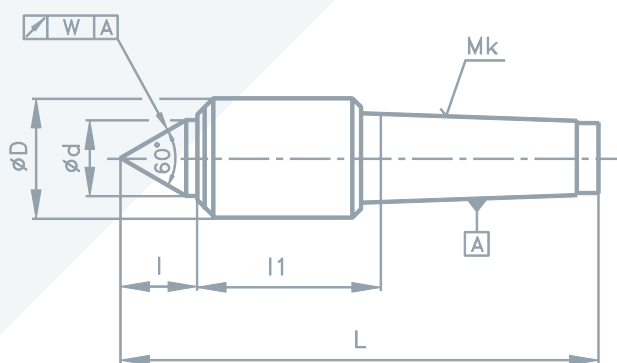

Mk	MORSE taper shank
n	max. rotation speed (rpm)
Q	max. workpiece weight (kg)
w	concentricity accuracy (mm)