


Precision live centers extended, with head angle 60°

Mk	Ø D	Ø d	L	l	l1	n	Q	m	w	catalogue no.
2	36	20	128,5	24	41	6 000	270	0,36	0,01	21-71282
3	47	28	167	34	53	5 000	320	0,84		21-71283
4	55	35	207,5	49	56,5	4 000	1 000	1,45		21-71284
5	69,5	45	259	66	63	3 500	1 600	3,2		21-71285
6	89	60	341	82	79	2 500	3 200	7,75		21-71286

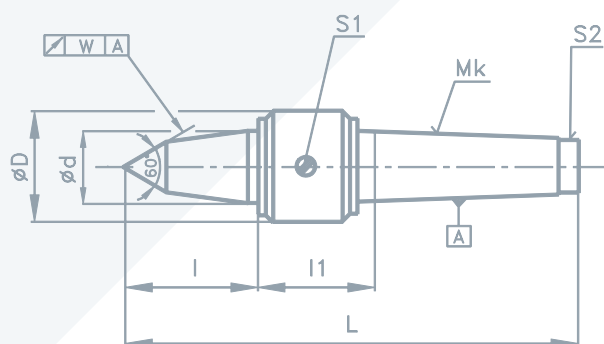

Mk	MORSE taper shank
n	max. rotation speed (rpm)
Q	max. workpiece weight (kg)
m	product weight (kg)
w	concentricity accuracy (mm)